



TG511

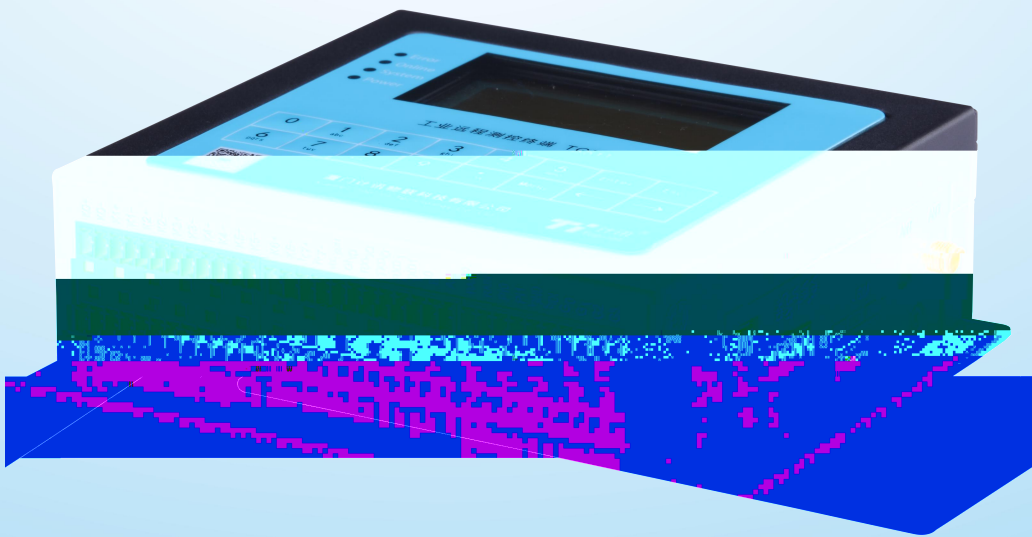

TG511

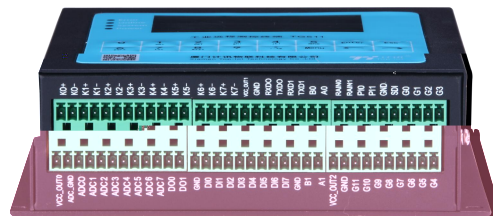


TG511

RTU

4G

RS232 RS485

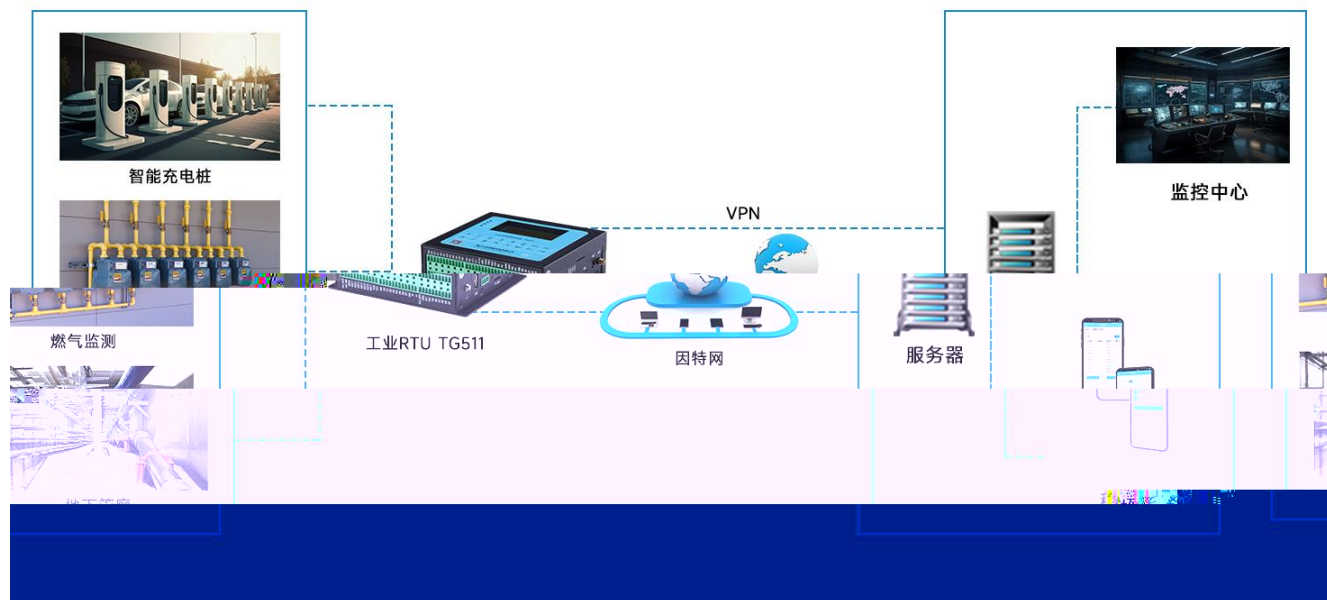




CPU	32
FLASH	512KB
SRAM	256KB
Flash	16MB
TF CARD	16GB
	DC 12V/1.5A
	DC 5 35V
	RS232 RS485
	15KV ESD
	300 230400bits/s
	5 6 7 8
	1 1.5 2
	SPACE MARK
	SMA 50
	M3
LCD	128*64
	2*8
	2 0V~1V
	2 2V~30V
	8 16 AD 4-20mA
	0-5V
	8
	0 0-3VDC 1 5-30VDC
	2 OC
	50mA 35V
2	8 30VDC/250VAC 5A



	3	1A 3	2A 12V
SD	SD	32G	TF
	-20 +75℃		
	95%		
	40mA 45mA@12VDC		
	40mA 80mA@12VDC		
	IP30		
	154.2×127×46.6 mm		
	900g		
		/	
	3		30A/m
	3		30A/m
	3		100A/m
	3	80MHz~1000MHz	10V/m
EMC 3			
MTBF	(MTBF) 100,000h		
EMC	EMC	3	
	NTP	RTC	
ESD	SIM/UIM	15KV ESD	



PPPKeepAliveTCP



> 2 RS2322 RS4852

> 816 AD4-20mA0-5V


> 828(2)

1 123

>

>

PLC

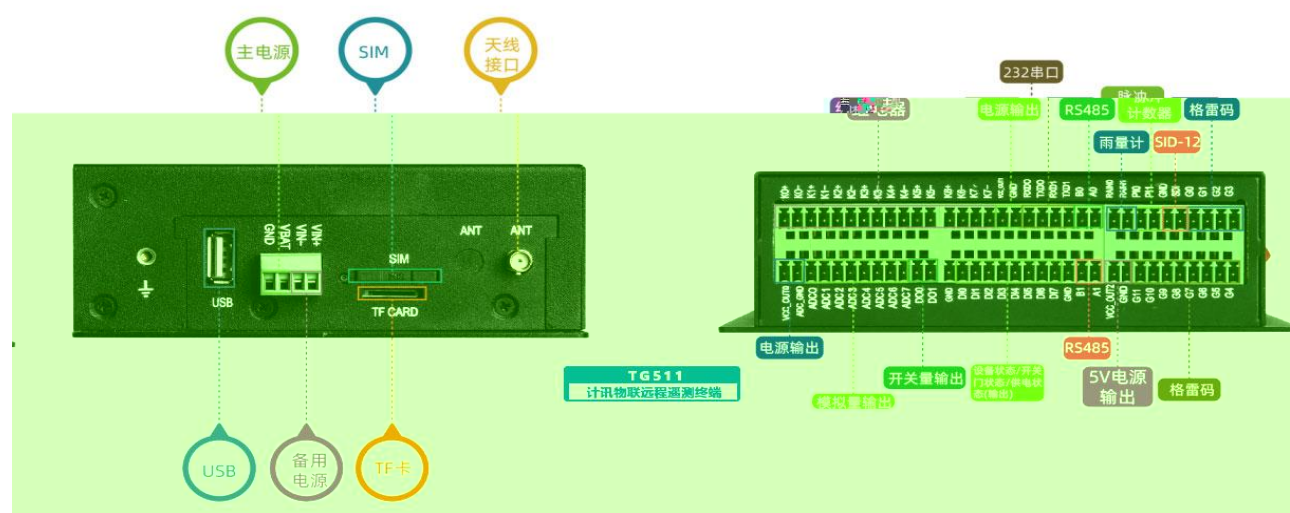



154.2×127×46.6 mm

