



TG473-A5

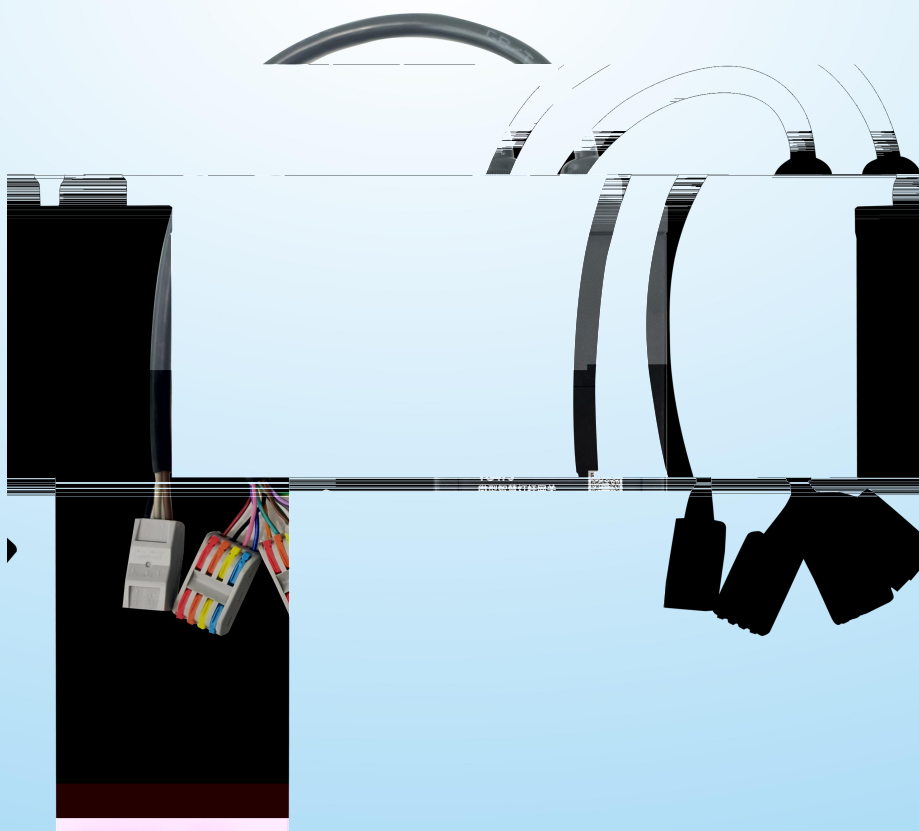

TG473-A5

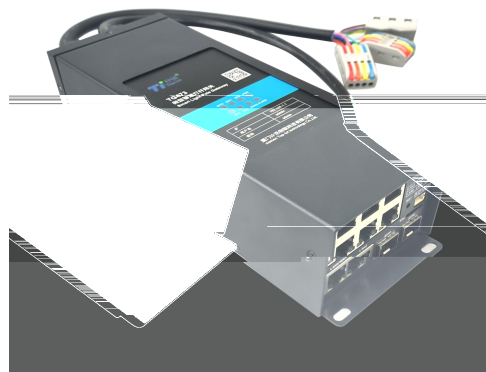

TG473-A5





		AC220V					
		85-264VAC/100-370VDC					
	DC12V(DC24V)	50W 75	3A 1.5A	4.5A 2A			
		2	SFP	1000Mbps			
	1	10/100/1000M	WAN	RJ45			
	7	10/100/1000M	LAN	RJ45			
	4	POE	MDI/MDIX				
		1.5KV					
DI		3					
		0	0-3VDC				
		1	5-30VDC				
RS485	2	RS485	15KV ESD				
		PWR	SYS	ONLINE	WIFI	ALARM	SFP
		SMA	50				
	SIM/UIM						
		1.8V/3V SIM/UIM	15KV ESD				
WiFi		2.4G WIFI	IEEE802.11b/g/n				
		IEEE802.11b/g	54Mbps				
		EEE802.11n	300Mbps				
		WEP	WPA	WPA2			
		21.5dBm	11g	26dBm	11b		
	<-72dBm@54Mbps						



	-35~+75℃		
	95%±3%		
	50mA@AC220		
		/	
	3		30A/m
	3		30A/m
	3		100A/m
	3	80MHz~1000MHz	10V/m
3			
	(MTBF)	100000h	
EMC	3		
NTP	RTC		
SIM/UIM	15KV ESD		
	IP30, ,		
	250mm*83.4mm*58.2mm		
	1173.2		



> WIFI() 5G/4G()

AP STA Repeater

> 2G() 4G() n

>



>

> PLC ZigBee/LoRa

>


Linux

>

telnet web ssh

>

web



250mm*83.4mm*58.2mm

